


P1,P2:	M-Y139C
	M-139H
P3:	M-426E

Customer No: _____

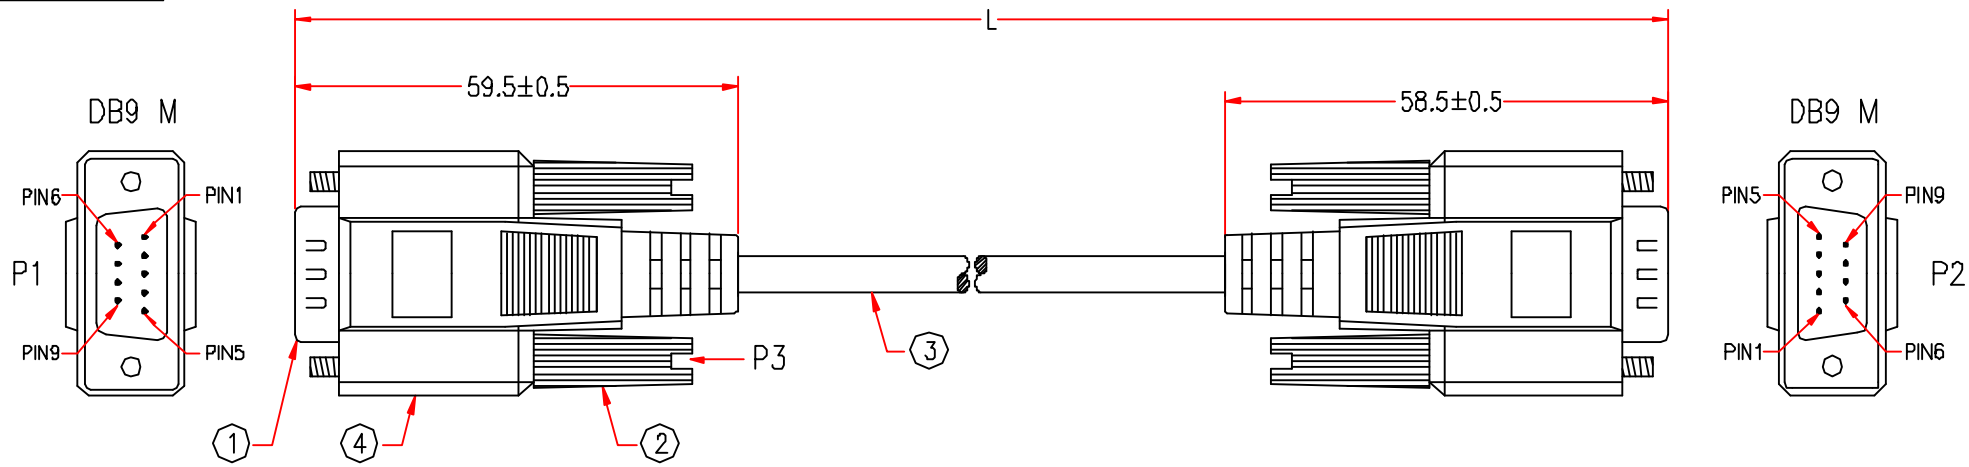

1003			
P1		P2	
1	_____	1	BROWN
2	_____	2	RED
3	_____	3	ORANGE
4	_____	4	YELLOW
5	_____	5	GREEN
6	_____	6	BLUE
7	_____	7	PURPLE
8	_____	8	GREY
9	_____	9	BLACK
SHIELD	_____	SHIELD	

*NOTE: All relevant materials are complied with RoHS directive .

4	BLACK PVC TUBE $\phi 3 \text{ } \square 22\text{mm}$	2	M304
	ALUMINUM FOIL 33*65mm	2	M379
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
3	NON-UL 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING No. EMAL2809C-051	L-20mm	M304
2	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	4	M95
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	2	M108
No.	DESCRIPTION	Q'TY	Supplier
APPROVED		PCCABLES.COM	
CHECKED	HU		
DRAWING	SU		
DATE	12/JUL/11	ITEM NO.	00811
	CHECKED	UNIT:mm	

Cable Length Unless Other Spec. Tolerances:	
0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm