



P1:	M-Y536A
	M-536A
P2:	M-780A


P1

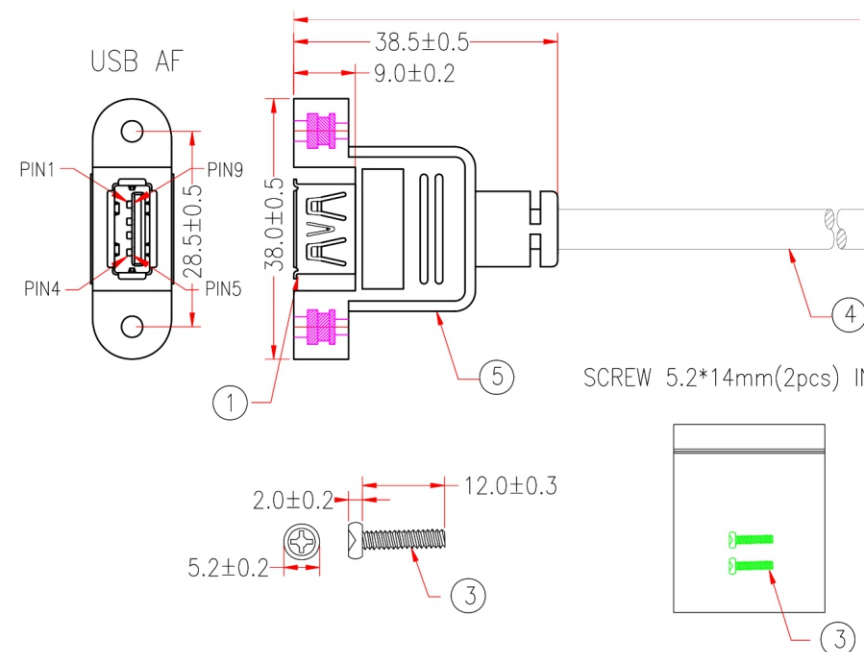

SCREW 5.2*14mm(2pcs) INSIDE SELF-GIVEN PAG

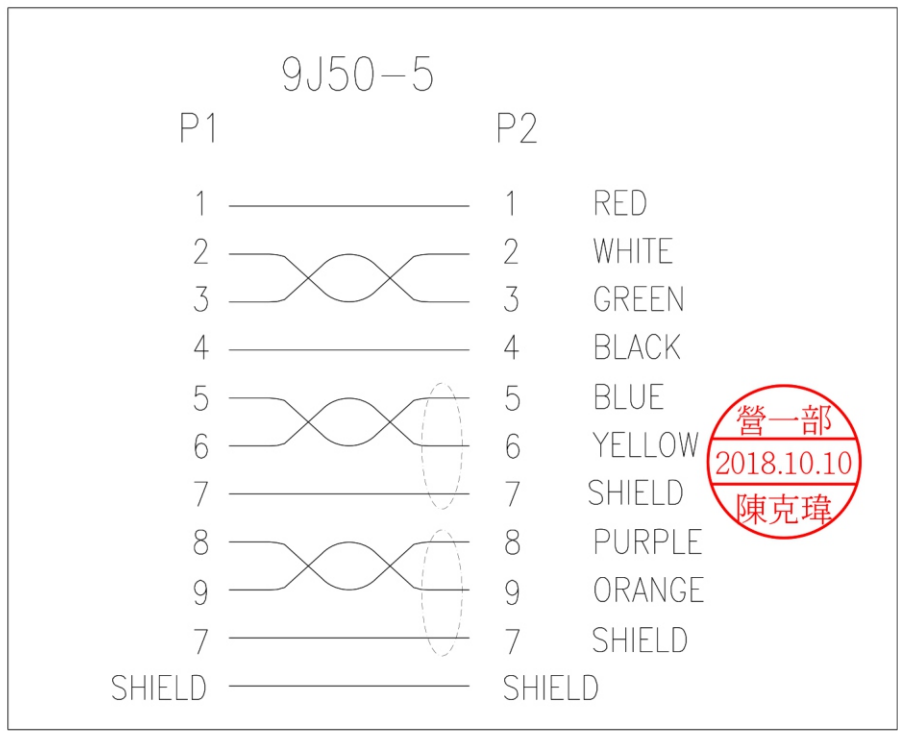

營一部
2018.10.10
陳克璋

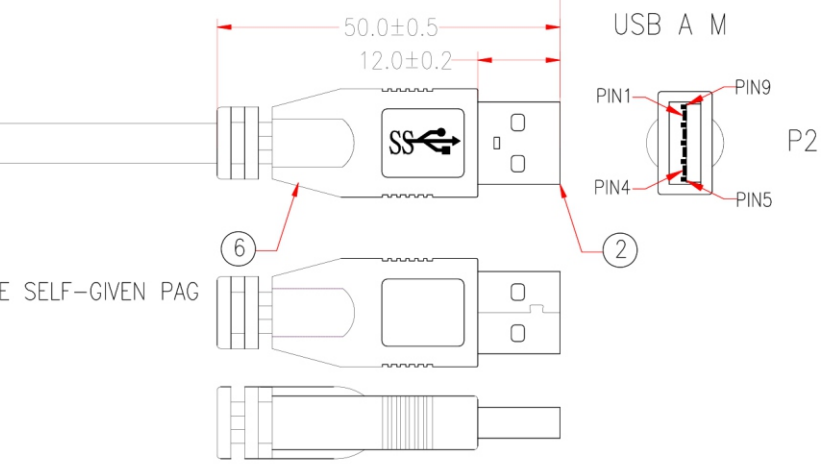

NOTE: All relevant materials are complied with RoHS directive .

6	BLACK HEAT SHRINK TUBE ϕ 1.0*3mm	A4HA23-0959	1	M959
	BLACK HEAT SHRINK TUBE ϕ 3.0*9mm	A4HA10-0959	2	M959
	MOLDED PVC BLACK	H1BF01-0304K09		M304
5	NON-UL 24AWG INSULATOR WIRE, LENGTH 20mm, JACKET ORANGE, DRAWING No. EH002401C-028	H5SG03-0304E01	1	M304
	BLACK HEAT SHRINK TUBE ϕ 1.0*10mm	A4HA23-0959	1	M959
	BLACK HEAT SHRINK TUBE ϕ 3.0*9mm	A4HA10-0959	2	M959
	HEX-NUT 5*4.0mm, #4-40	A6BC01-0095	2	M95
	ALUMINUM FOIL 12*65mm	A6MA10-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
4	USB 3.0 CABLE, 28AWG*1PAIR+(28AWG*1PAIR+D+F-AL)*2PCS+24AWG*2C+AMA BRAID, OD 5.8mm JACKET BLACK, DRAWING NO. EUAB2801P2802P2402C-333	H5KS02-0304K09	285mm	M304
	MOLDED PVC BLACK	H1BF01-0304K09		M304
3	SCREW 5.2*14mm, 4-40#	A6AC12-0095	2	M95
2	USB A MALE 3.0, GOLD FLASH ON CONTACTS, BLUE INSULATOR, SHORT TYPE	A1HA48-0108	1	M108
1	USB A FEMALE 3.0, GOLD FLASH ON CONTACTS, BLUE INSULATION	A1HC19-0432	1	M432
No.	DESCRIPTION		Q'TY	Supplier

APPROVED		PCCABLES.COM	Cable Length Unless Other Spec. Tolerances: 0 ~200mm \pm 10mm 201~1000mm \pm 20mm 1001 ~1500mm \pm 25mm 1501~2100mm \pm 30mm 2100mm \pm 40mm		
CHECKED	HU				
DRAWING	ZHU				
DATE	10/OCT/18	ITEM NO.	70311	UNIT:mm	