


P1: M-342

P2: M-804

RE.1 2001.10.29

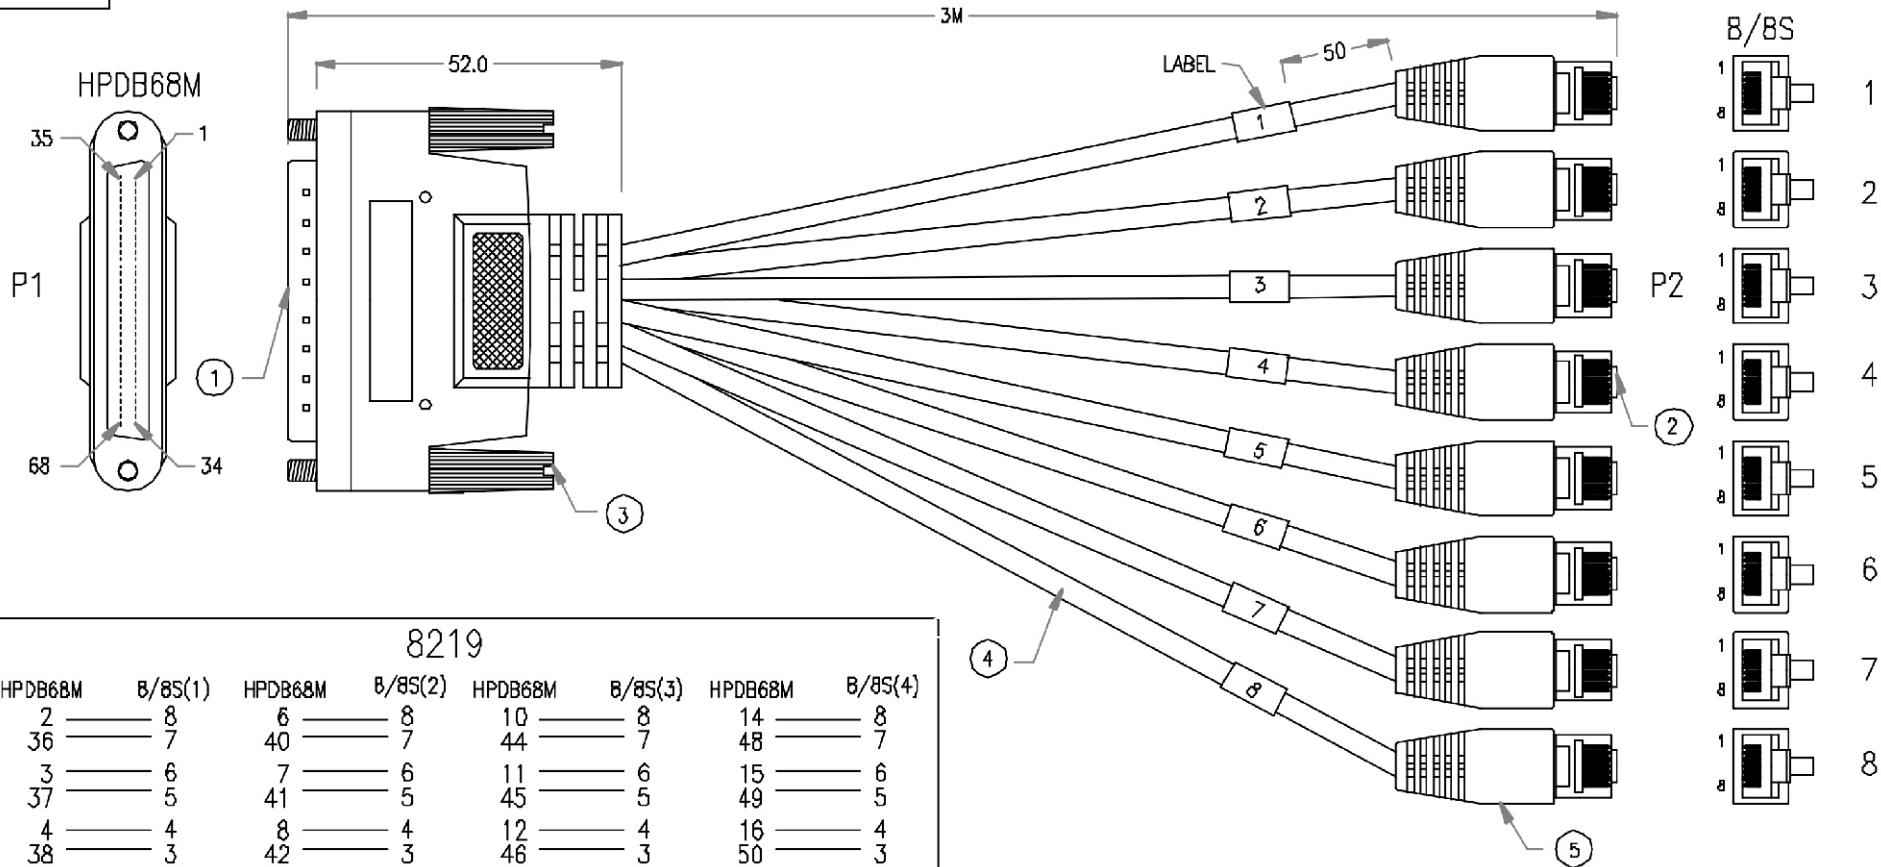

8219

HPDB68M	B/BS(1)	HPDB68M	B/BS(2)	HPDB68M	B/BS(3)	HPDB68M	B/BS(4)
2	8	6	8	10	8	14	8
36	7	40	7	44	7	48	7
3	6	7	6	11	6	15	6
37	5	41	5	45	5	49	5
4	4	8	4	12	4	16	4
38	3	42	3	46	3	50	3
5	2	9	2	13	2	17	2
39	1	43	1	47	1	51	1
SHIELD	SHIELD	SHIELD	SHIELD	SHIELD	SHIELD	SHIELD	SHIELD

HPDB68M	B/BS(5)	HPDB68M	B/BS(6)	HPDB68M	B/BS(7)	HPDB68M	B/BS(8)
18	8	22	8	26	8	30	8
52	7	56	7	60	7	64	7
19	6	23	6	27	6	31	6
53	5	57	5	61	5	65	5
20	4	24	4	28	4	32	4
54	3	58	3	62	3	66	3
21	2	25	2	29	2	33	2
55	1	59	1	63	1	67	1
SHIELD	SHIELD	SHIELD	SHIELD	SHIELD	SHIELD	SHIELD	SHIELD

No.	DESCRIPTION	Q'TY	Supplier
5	MOLDED PVC COLOR (DY1034)		M304
4	UL2919 28AWG 4 TWISTED PAIRS, ALUM-MYLAR AND COPPER BRAID FOIL SHIELDING WITH DRAIN WIRE, OD 5.0, JACKET COLOR (DY1034)	8	M2
3	MOLDED THUMBSCREW #4-40, 4*41mm, COLOR (DY1034)	2	M95
2	8P8C MODULAR PLUG WITH METAL SHELL, GOLD PLATING ON CONTACTS	8	M208
1	HPDB68 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR	1	MB3

APPROVED		<p style="text-align: center;">PCCABLES.COM</p> <p style="text-align: center;">Octal-Async</p> <p style="text-align: center;">↑ CO-081XX</p>	<p>Cable Length Tolerances:</p> <p>0 ~0.2M ±0.01M</p> <p>0.21~1.0M ±0.02M</p> <p>1.1~1.5M ±0.025M</p> <p>1.51~2.1M ±0.03M</p> <p>2.1M ↑ ±0.04M</p>
CHECKED			
DRAWING	ITEM NO.		